


MARYLAND STANDARDS FOR AGRICULTURAL BMPs

DETAIL 362-B - DIVERSION WITH EROSION CONTROL MATTING

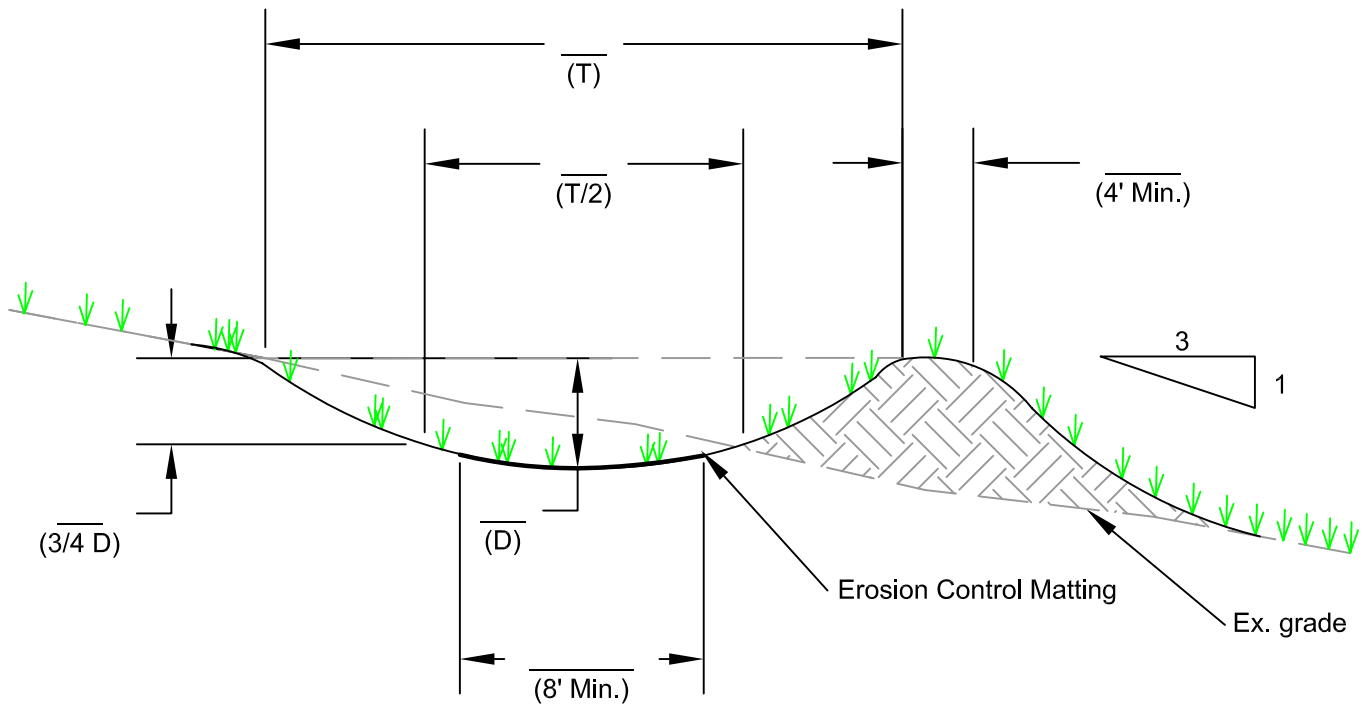

General Notes:

- Remove topsoil prior to grading and stockpile outside limits of diversion construction.
- Install erosion control matting according to manufacturer's recommendations.
- Provide minimum 4" of topsoil to facilitate revegetation.
- Seed all disturbed areas according to the attached seeding specifications.
- Erosion control matting to be _____.

Diversion Detail

362-B-MATTING.DWG

NTS